



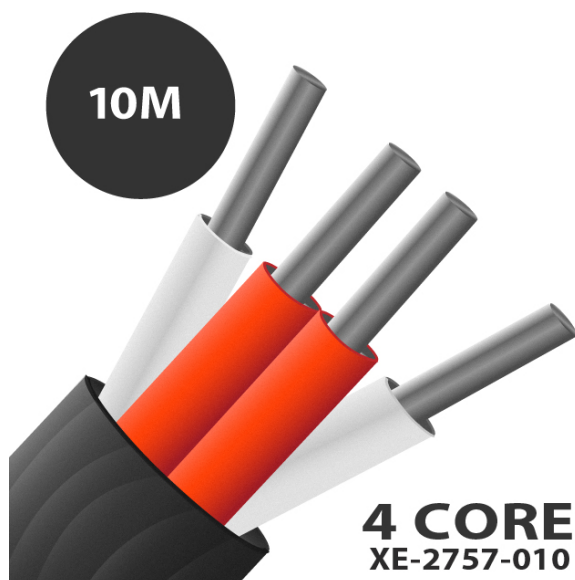

LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

4 Core PTFE Insulated, Silver Plated Copper Screen, PRT Sensor Cable / Wire

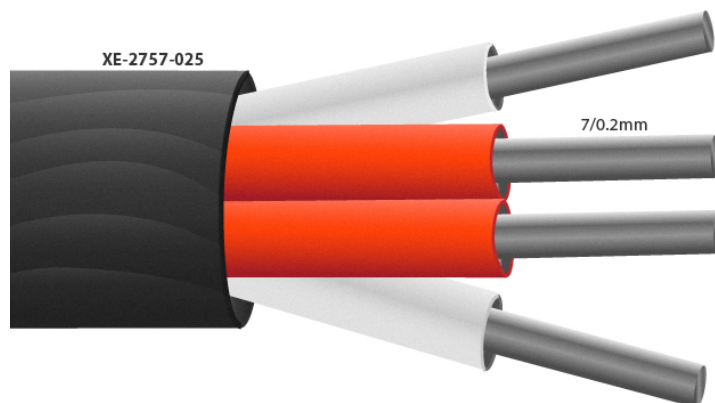

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

4 Core PTFE Insulated, Silver Plated Copper Screen, PRT Sensor Cable / Wire

Can be used to extend 2, 3 or 4 wire RTD configurations. Commonly used for Pt100? thermometers, also suitable with other types such as Pt130, Pt500 & Pt1000?

Specifications**Specifications**

General Description	4 core PTFE insulated 7/0.2mm silver plated copper conductors, twisted cores, kapton tape, silver plated copper braided screen with PTFE insulated outer jacket
Cable Length	10m, 25m, 50m, 100m
Cable Type	wrapped PTFE tape construction
Core / Strands	7/0.2mm
Insulation Material	Overall black PTFE insulation
Max. Temperature	+260°C
Min. Temperature	-75°C
Number of Wires	4
Standards Met	Cores colour coded 2 x Red / 2 x White to IEC-751 + black outer jacket