




Thermocouple Compensating Cable / Wire (IEC) Type U (RCA) (SCA) PVC Insulated Flat Pair for use with type R & S thermocouples - 7/0.2mm

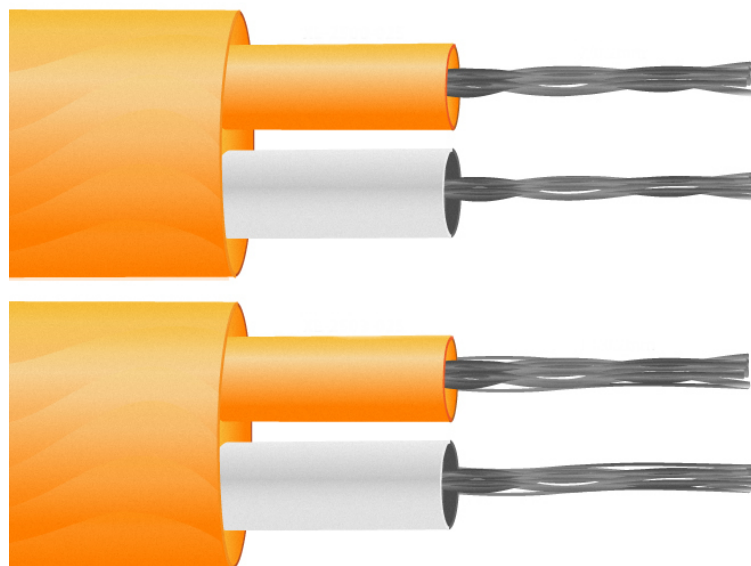

—K—J—T—N—RCA—KCB

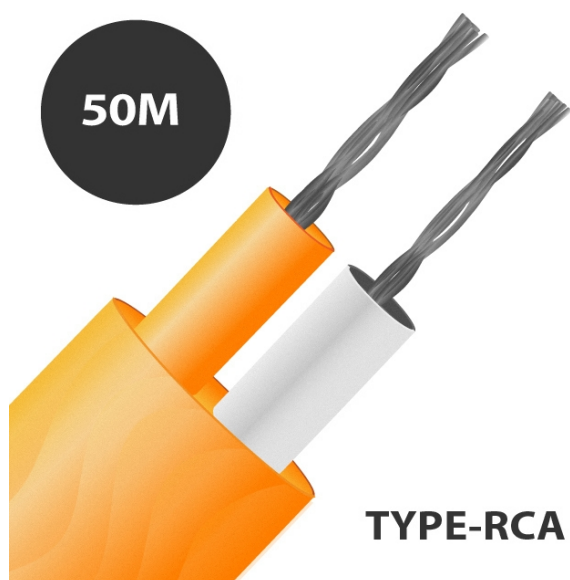

TYPE-RCA

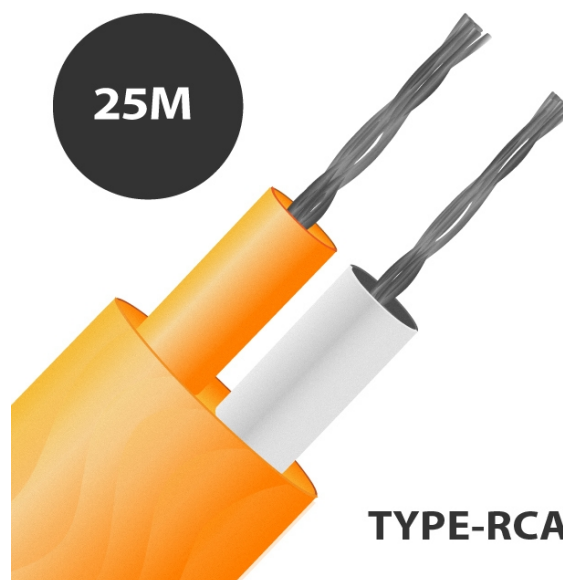

TYPE-RCA

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Specifications**Specifications**

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10, 25, 50, 100m, 200m
Cable Type	Flat pair construction
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Orange
+ Colour	Orange
- Colour	White
Insulation Material	PVC Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	0.2
Max. Temperature	+105°C
Min. Temperature	-10°C
+ Conductor	Copper
- Conductor	Copper Nickel
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	U (RCA) (SCA)



Tolerance	Class 2
-----------	---------